PRELIMINARY CIVIL SITE PLANS

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

SHEET INDEX

SHEET	TITLE
T1	TITLE SHEET
C1	EXISTING CONDITIONS PLAN
C2	SITE DEVELOPMENT PLAN
C3	EROSION CONTROL & DEMOLITION PLAN
C4	GRADING & PAVING PLAN
C5	DRAINAGE PLAN & CALCULATIONS
C6	UTILITY PLAN
C7	LANDSCAPE PLAN
C8	SITE LIGHTING PLAN

LEGEND	
Property line	heavy solid
Building setback	dash-dot
Existing contour	grey dashed
Proposed contour	solid
Storm sewer	—SD— (CB, FES)
Sanitary sewer	—SS— (SMH)
Water main	—W— (HYD, GV)
Electric / Gas	—E— —G—
Silt fence / sock	—SF—

SITE LOCATION — SUBJECT PARCEL OUTLINED



PROJECT DATA	
Parcel area	12.91 ac
Zoning	Zoning: HF
Proposed building	15,000 SF
Parking provided	75 stalls (3 ADA)
Impervious (new)	55,450 SF
Disturbed area	2.39 ac
Detention	78,007 CF
Water / Sewer	Public (assumed, selected road)

NOTES

1. These plans were generated by FORMA from a concept site layout and public data. They are a preliminary design for planning, budgeting and agency pre-application discussions.
2. Existing topography is from USGS 3DEP; buildings from OSM / Microsoft footprints; wetlands from NWI; flood zones from FEMA. None of it is a field survey.
3. Utility connections assume public water and sanitary sewer in the adjacent right-of-way. Existing main depth and location are assumed and must be confirmed with the utility.
4. Rainfall depths: NOAA Atlas 14 (point precipitation frequency estimates). Soil group: USDA NRCS Soil Data Access.
5. No sheet in this set is signed or sealed. The engineer of record must review, revise and seal before submission.

AGENCY APPROVAL

REVIEWED BY: _____

DATE: _____

APPROVED: _____

PRELIMINARY — FOR PLANNING AND PERMIT-PREPARATION REVIEW ONLY. NOT SEALED, NOT FOR CONSTRUCTION. Existing conditions are compiled from public GIS data and have not been field surveyed; a licensed surveyor and the engineer of record must verify before any design is relied on.

PRELIMINARY

NOT SEALED

FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	N.T.S.
Checked By:	—	Project No:	C3126FF7


Sheet Title:

TITLE SHEET

T1

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 TITLE SHEET | Layout: TITLE SHEET - T1

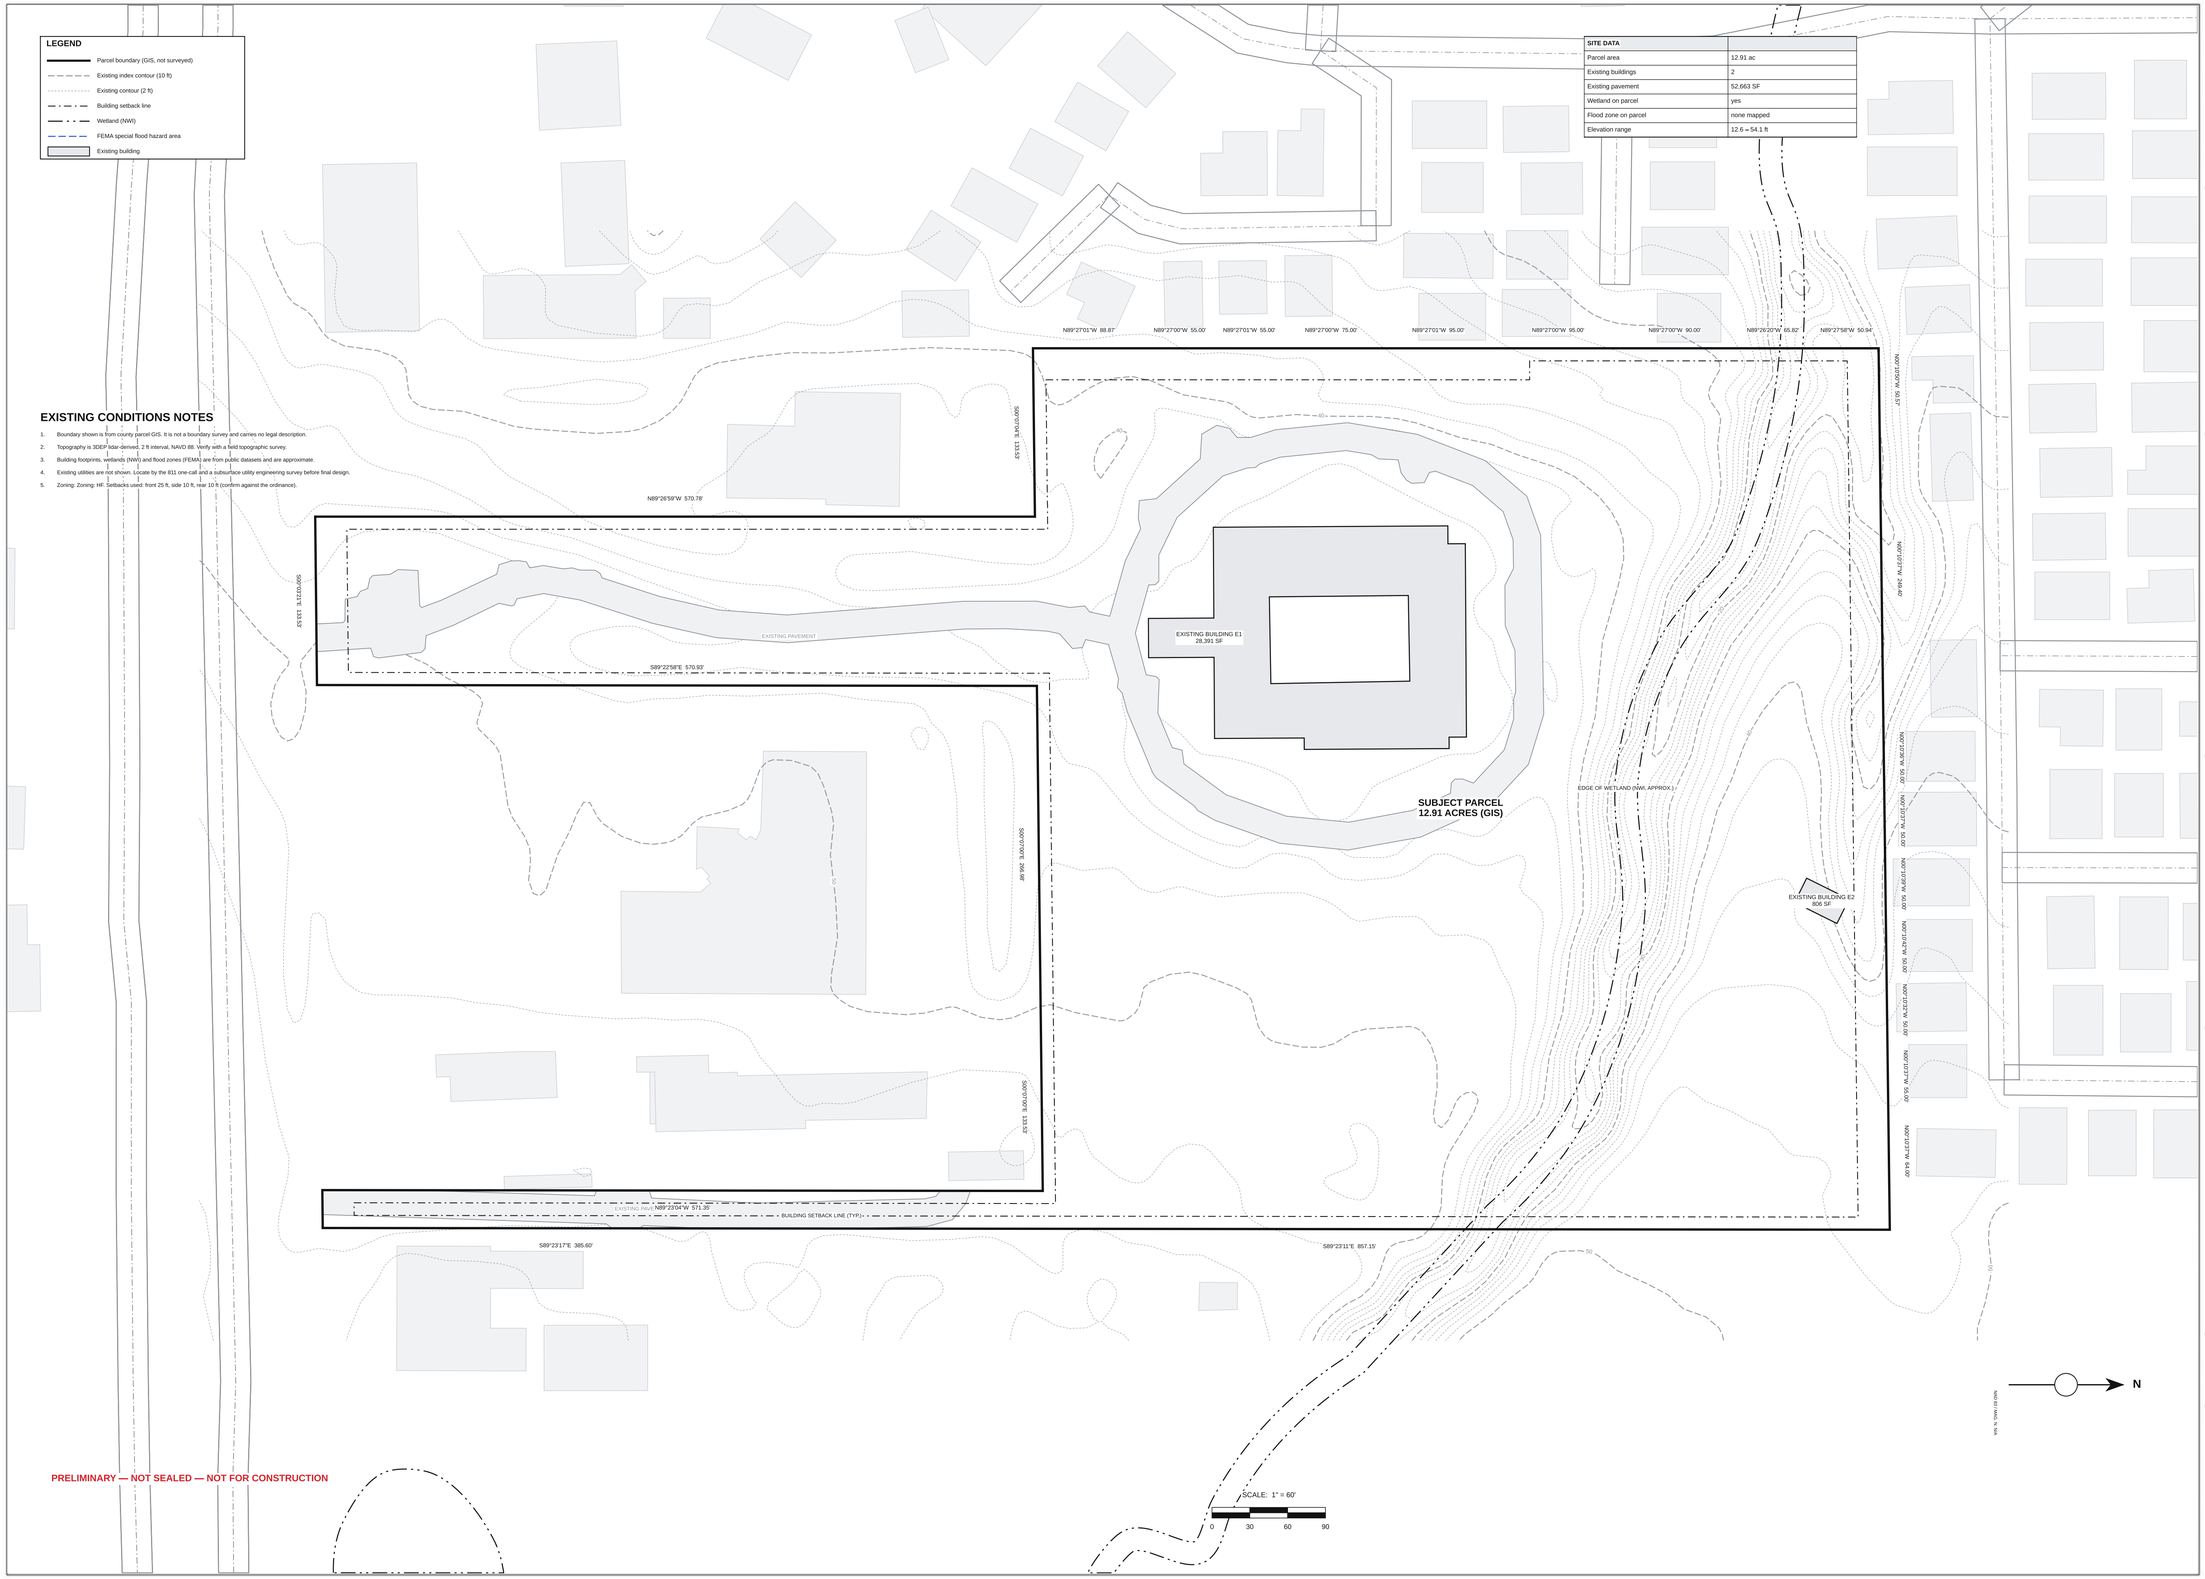

PRELIMINARY

NOT SEALED

FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 60'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

EXISTING CONDITIONS PLAN

C1

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 EXISTING CONDITIONS PLAN | sheet EXISTING CONDITIONS PLAN | C1

SITE DATA	
Parcel area	12.91 ac
Proposed building	15,000 SF
Parking provided	75 (3 ADA)
Parking ratio	5.0 / 1,000 SF
New impervious	55,450 SF
Reused pavement	41,380 SF
Open space / landscape	24,860 SF
Stormwater pond	0.18 ac top

LEGEND

- Proposed building
- Proposed curb / edge of pavement
- Building setback line
- Property line

EXISTING PAVEMENT (TO REMAIN)

EXISTING BUILDING (TO REMAIN)

EDGE OF WETLAND (NW, APPROX.)

ACCESS DRIVE — 20' PAVED

TYP. STALL: 9'×18'

PROPOSED BUILDING
15,000 SF

188'

CONNECTION TO EXISTING PAVEMENT / ROAD

BUILDING SETBACK LINE (TYP.)

N

SITE NOTES

1. All dimensions are to face of curb unless noted.
2. Parking stalls per concept layout; verify count and ADA requirements with the local code.
3. Proposed pavement section, curb and sidewalk details to be provided in final plans.
4. Site lighting, landscaping, utilities and drainage are shown on sheets C5 – C8.

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

SCALE: 1" = 40'

0 20 40 60

PRELIMINARY
NOT SEALED
FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USDANAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd
Clearwater, FL
Pinellas County

Zoning: HF

Prepared For:

Apollo Development
—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7

Sheet Title:


SITE DEVELOPMENT PLAN

C2

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 SITE DEVELOPMENT PLAN_Layout: SITE DEVELOPMENT PLAN - C2

Drawing: C3 | SWFT EROSION CONTROL & DEMOLITION PLAN | Layout: EROSION CONTROL & DEMOLITION PLAN | Xref: C3

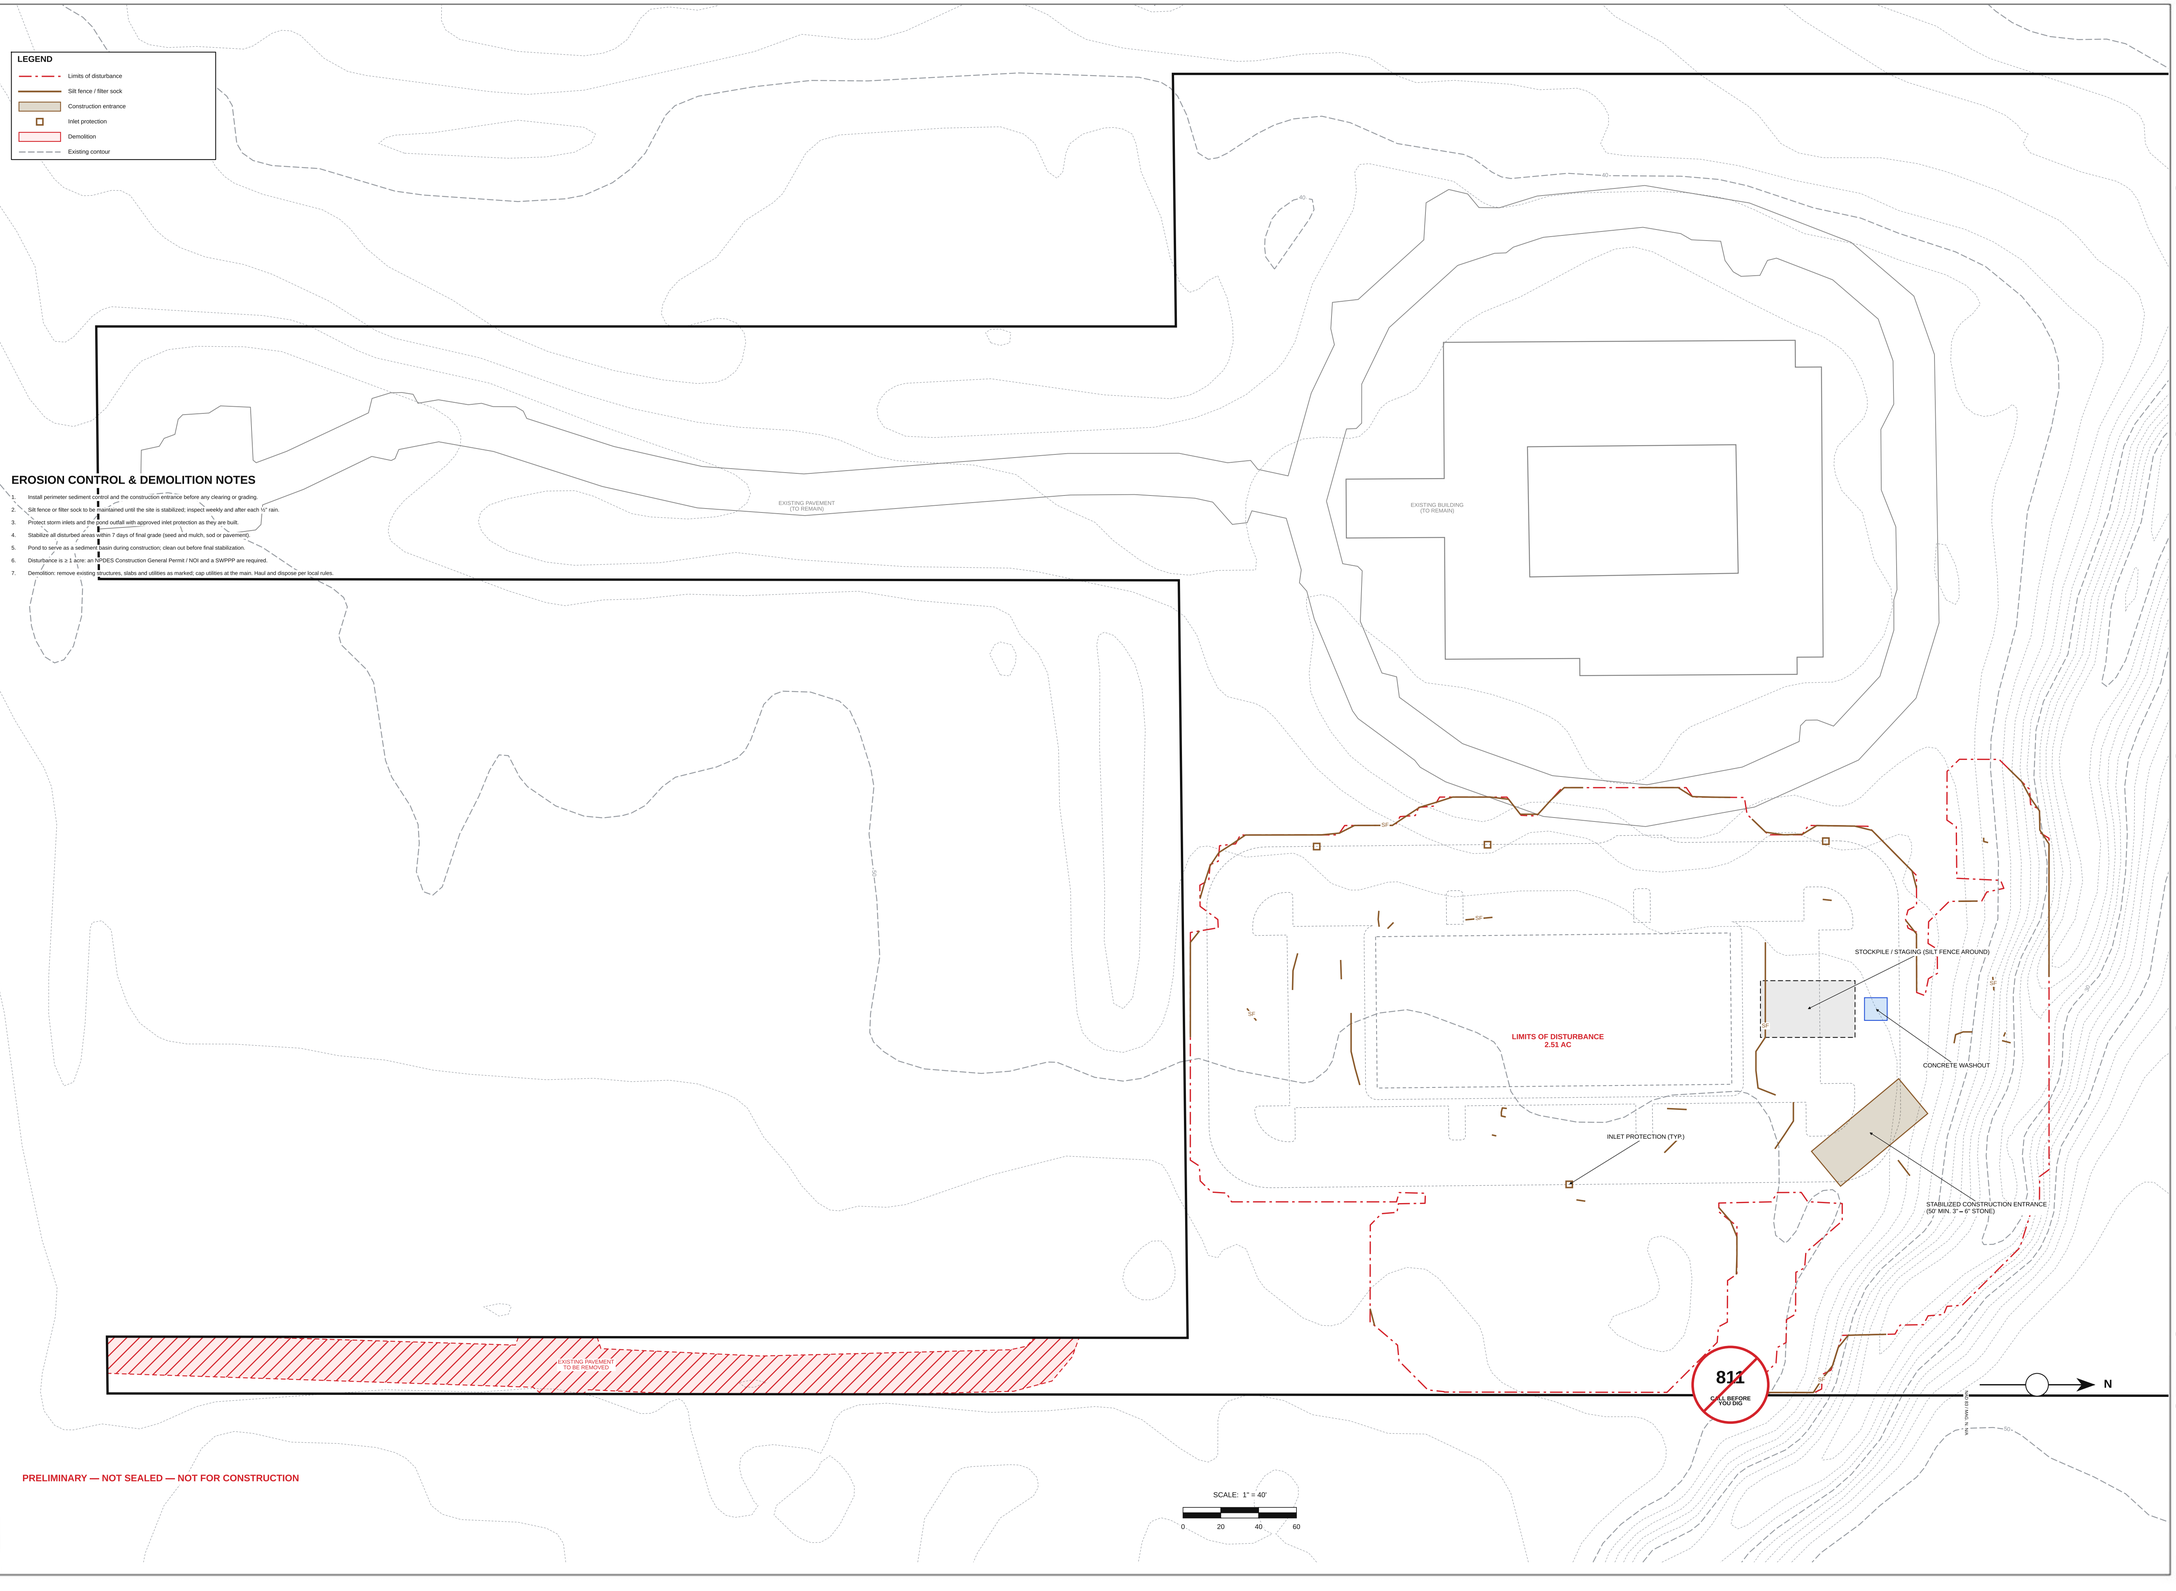

EROSION CONTROL & DEMOLITION NOTES

1. Install perimeter sediment control and the construction entrance before any clearing or grading.
2. Silt fence or filter sock to be maintained until the site is stabilized; inspect weekly and after each ½" rain.
3. Protect storm inlets and the pond outfall with approved inlet protection as they are built.
4. Stabilize all disturbed areas within 7 days of final grade (seed and mulch, sod or pavement).
5. Pond to serve as a sediment basin during construction; clean out before final stabilization.
6. Disturbance is ≥ 1 acre: an NPDES Construction General Permit / NOI and a SWPPP are required.
7. Demolition: remove existing structures, slabs and utilities as marked; cap utilities at the main. Haul and dispose per local rules.

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

PRELIMINARY

NOT SEALED

FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

EROSION CONTROL & DEMOLITION PLAN

C3

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

EARTHWORK (PRELIM.)	
Cut	5,950 CY
Fill	2,070 CY
Net	-3,880 CY (export)
Max cut / fill	19.1 / 5.7 ft
Disturbed	2.39 ac

LEGEND

- Proposed index contour (10 ft)
- Proposed contour (2 ft)
- Existing contour
- Limits of disturbance
- + Spot elevation

GRADING NOTES

1. Pavement: max 6% along the drive; cross-slope 1.5% crown off the drive centerline; ADA stalls and routes ≤ 2%.
2. Slab finished floor set 0.5 ft above the highest adjacent pavement.
3. Cut and fill slopes 3H:1V maximum; stabilize with seed and mulch or sod.
4. Earthwork quantities are from a 5 ft grid surface and are not adjusted for shrink, swell, topsoil stripping or pavement sections.
5. Verify vertical datum NAVD 88 with a field survey before use.

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

EXISTING PAVEMENT (TO REMAIN)

EXISTING BUILDING (TO REMAIN)

PROPOSED BUILDING
15,000 SF
FFE = 50.90

DETENTION POND (CONCEPT FOOTPRINT)
TOP 47.1 BOT 33.1 DEPTH 14.0'
WEIR 45.6
1:1 SIDE SLOPES

48.08 48.28 48.28 49.53 46.75 46.75 46.35 48.87 49.28 49.28 46.25 47.05 47.88 50.09 50.67 50.39 50.33 50.15 49.34 40 45 50 55 60 S

SCALE: 1" = 40'

0 20 40 60

N

Drawing: C3126FF7 GRADING & PAVING PLAN Layout: GRADING & PAVING PLAN Tab: C4

PRELIMINARY
NOT SEALED
FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd
Clearwater, FL
Pinellas County

Zoning: HF

Prepared For:

Apollo Development
—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

GRADING & PAVING PLAN

C4

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

PRE / POST PEAK RUNOFF & POND ROUTING


STORM	PRE (cfs)	POST (cfs)	OUT (cfs)	STAGE (ft)
2-yr	0.02	3.81	1.16	35.35
10-yr	0.41	6.05	1.55	36.53
25-yr	1.12	7.97	1.81	37.51
50-yr	1.86	9.67	2.01	38.36
100-yr	2.83	11.65	2.21	39.33

POND DATA	
Top / bottom	47.10 / 33.10
Storage at top	78,007 CF
Orifice	6.0" dia.
Weir crest / length	45.60 / 10 ft
CN pre / post	36 / 91
Tc pre / post	10.4 / 6.9 min
Soil group	A

PIPE	FROM → TO	LEN	DIA	SLOPE	Q10	CAP	INV UP	INV DN
P-1	CB-1 → FES-1	32'	24"	0.50%	10.6	17.3	44.36	44.10
P-2	CB-2 → DMH-1	81'	15"	0.50%	3.2	4.9	46.23	45.73
P-3	DMH-1 → DMH-2	85'	18"	0.50%	5.1	8.0	45.73	45.20
P-4	DMH-2 → DMH-3	71'	18"	0.50%	5.1	8.0	45.20	44.75
P-5	DMH-3 → CB-1	57'	18"	0.50%	5.1	8.0	44.75	44.36
P-6	CB-3 → DMH-1	49'	12"	0.50%	1.9	2.7	46.07	45.73
P-7	CB-4 → CB-2	179'	12"	0.50%	2.1	2.7	47.22	46.23

EXISTING PAVEMENT (TO REMAIN)

EXISTING BUILDING (TO REMAIN)

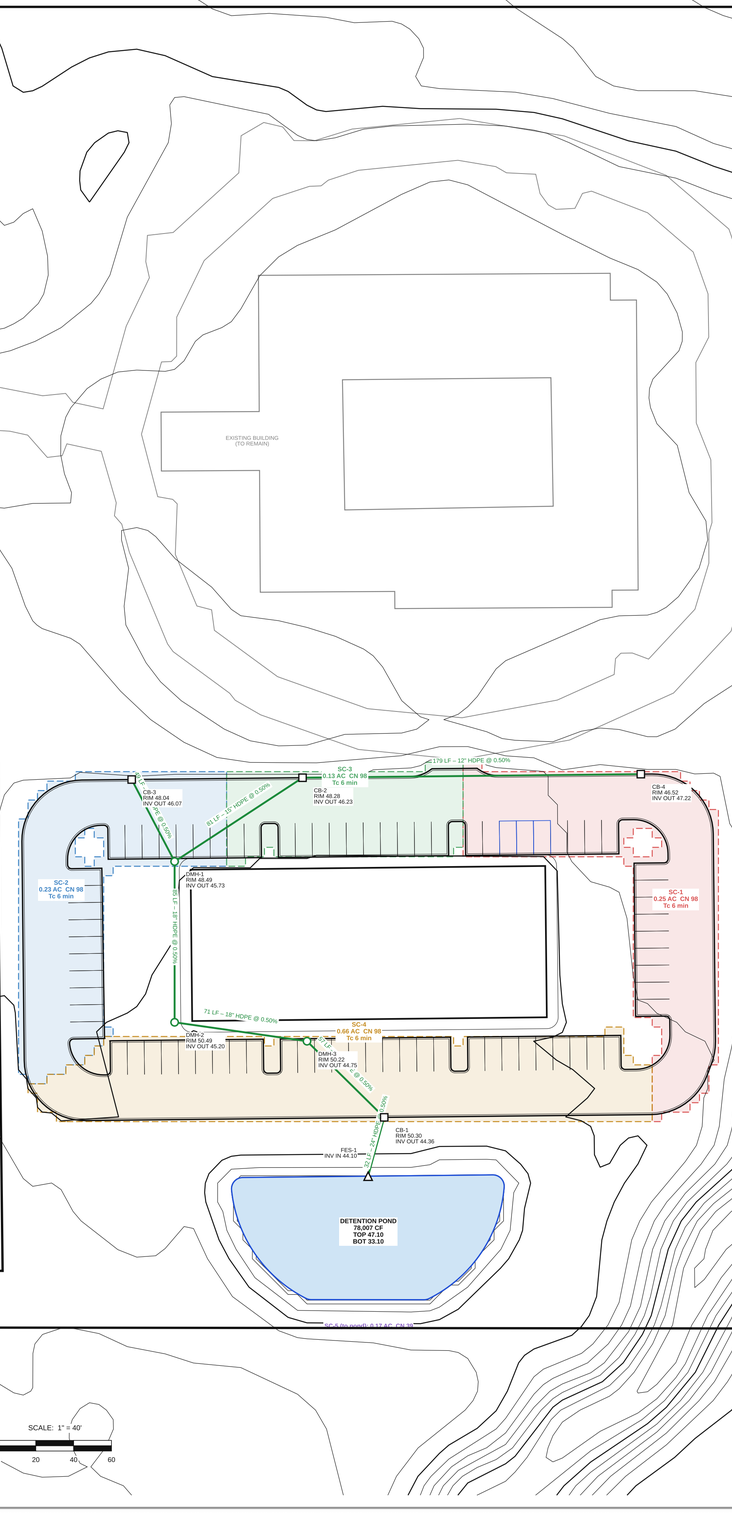

N

SCALE: 1" = 40'

0 20 40 60

LEGEND

- Storm sewer
- Catch basin
- Storm manhole (all bends / joints)
- Flared end section
- Detention pond
- Subcatchment

DRAINAGE NOTES

1. Hydrology: SCS TR-55 with SCS 24-hr Type III rainfall; NOAA Atlas 14 (point precipitation frequency estimates).
2. Pond routed by modified Puls through a single orifice and rectangular emergency weir; post-development peaks are held at or below pre-development for the 2- through 50-year storms.
3. Storm sewer sized by Manning's equation for the 10-year storm, min. 2.5 fps, min. 2 ft cover (to be verified with final structure and pipe details). Pipe runs are straight; every bend, junction and change of size is a catch basin or manhole.
4. Pipes are HDPE unless noted; CB rims and inverts are preliminary.
5. Pond top set 7.0 ft lower (bank 47.1) so the storm sewer can drain to it by gravity
6. Detention could not fully attenuate post to pre-development peaks within the layout's pond footprint at a 14.0 ft depth; the footprint cannot change, so reduce impervious area or add underground storage
7. The concept pond footprint is too narrow for 3:1 slopes at the depth needed; interior slopes are 1:1 (retaining walls / structural slopes) to hold the volume
8. The pond is 14.0 ft deep to hold the required volume inside the concept footprint; provide fencing / safety bench and confirm geotechnical and groundwater conditions
9. CB-2: only 0.8 ft of cover over the outlet pipe; use RCP or raise grades
10. DMH-1: only 1.3 ft of cover over the outlet pipe; use RCP or raise grades
11. CB-3: only 1.0 ft of cover over the outlet pipe; use RCP or raise grades
12. CB-4: the pond outfall is higher than this inlet, so gravity drainage does not work as drawn; lower the pond, regrade, or add a pump / forebay (engineer to resolve)

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

PRELIMINARY
NOT SEALED
FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7


Sheet Title:

DRAINAGE PLAN & CALCULATIONS

C5

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 DRAINAGE PLAN & CALCULATIONS Layout: DRAINAGE PLAN & CALCULATIONS - C5

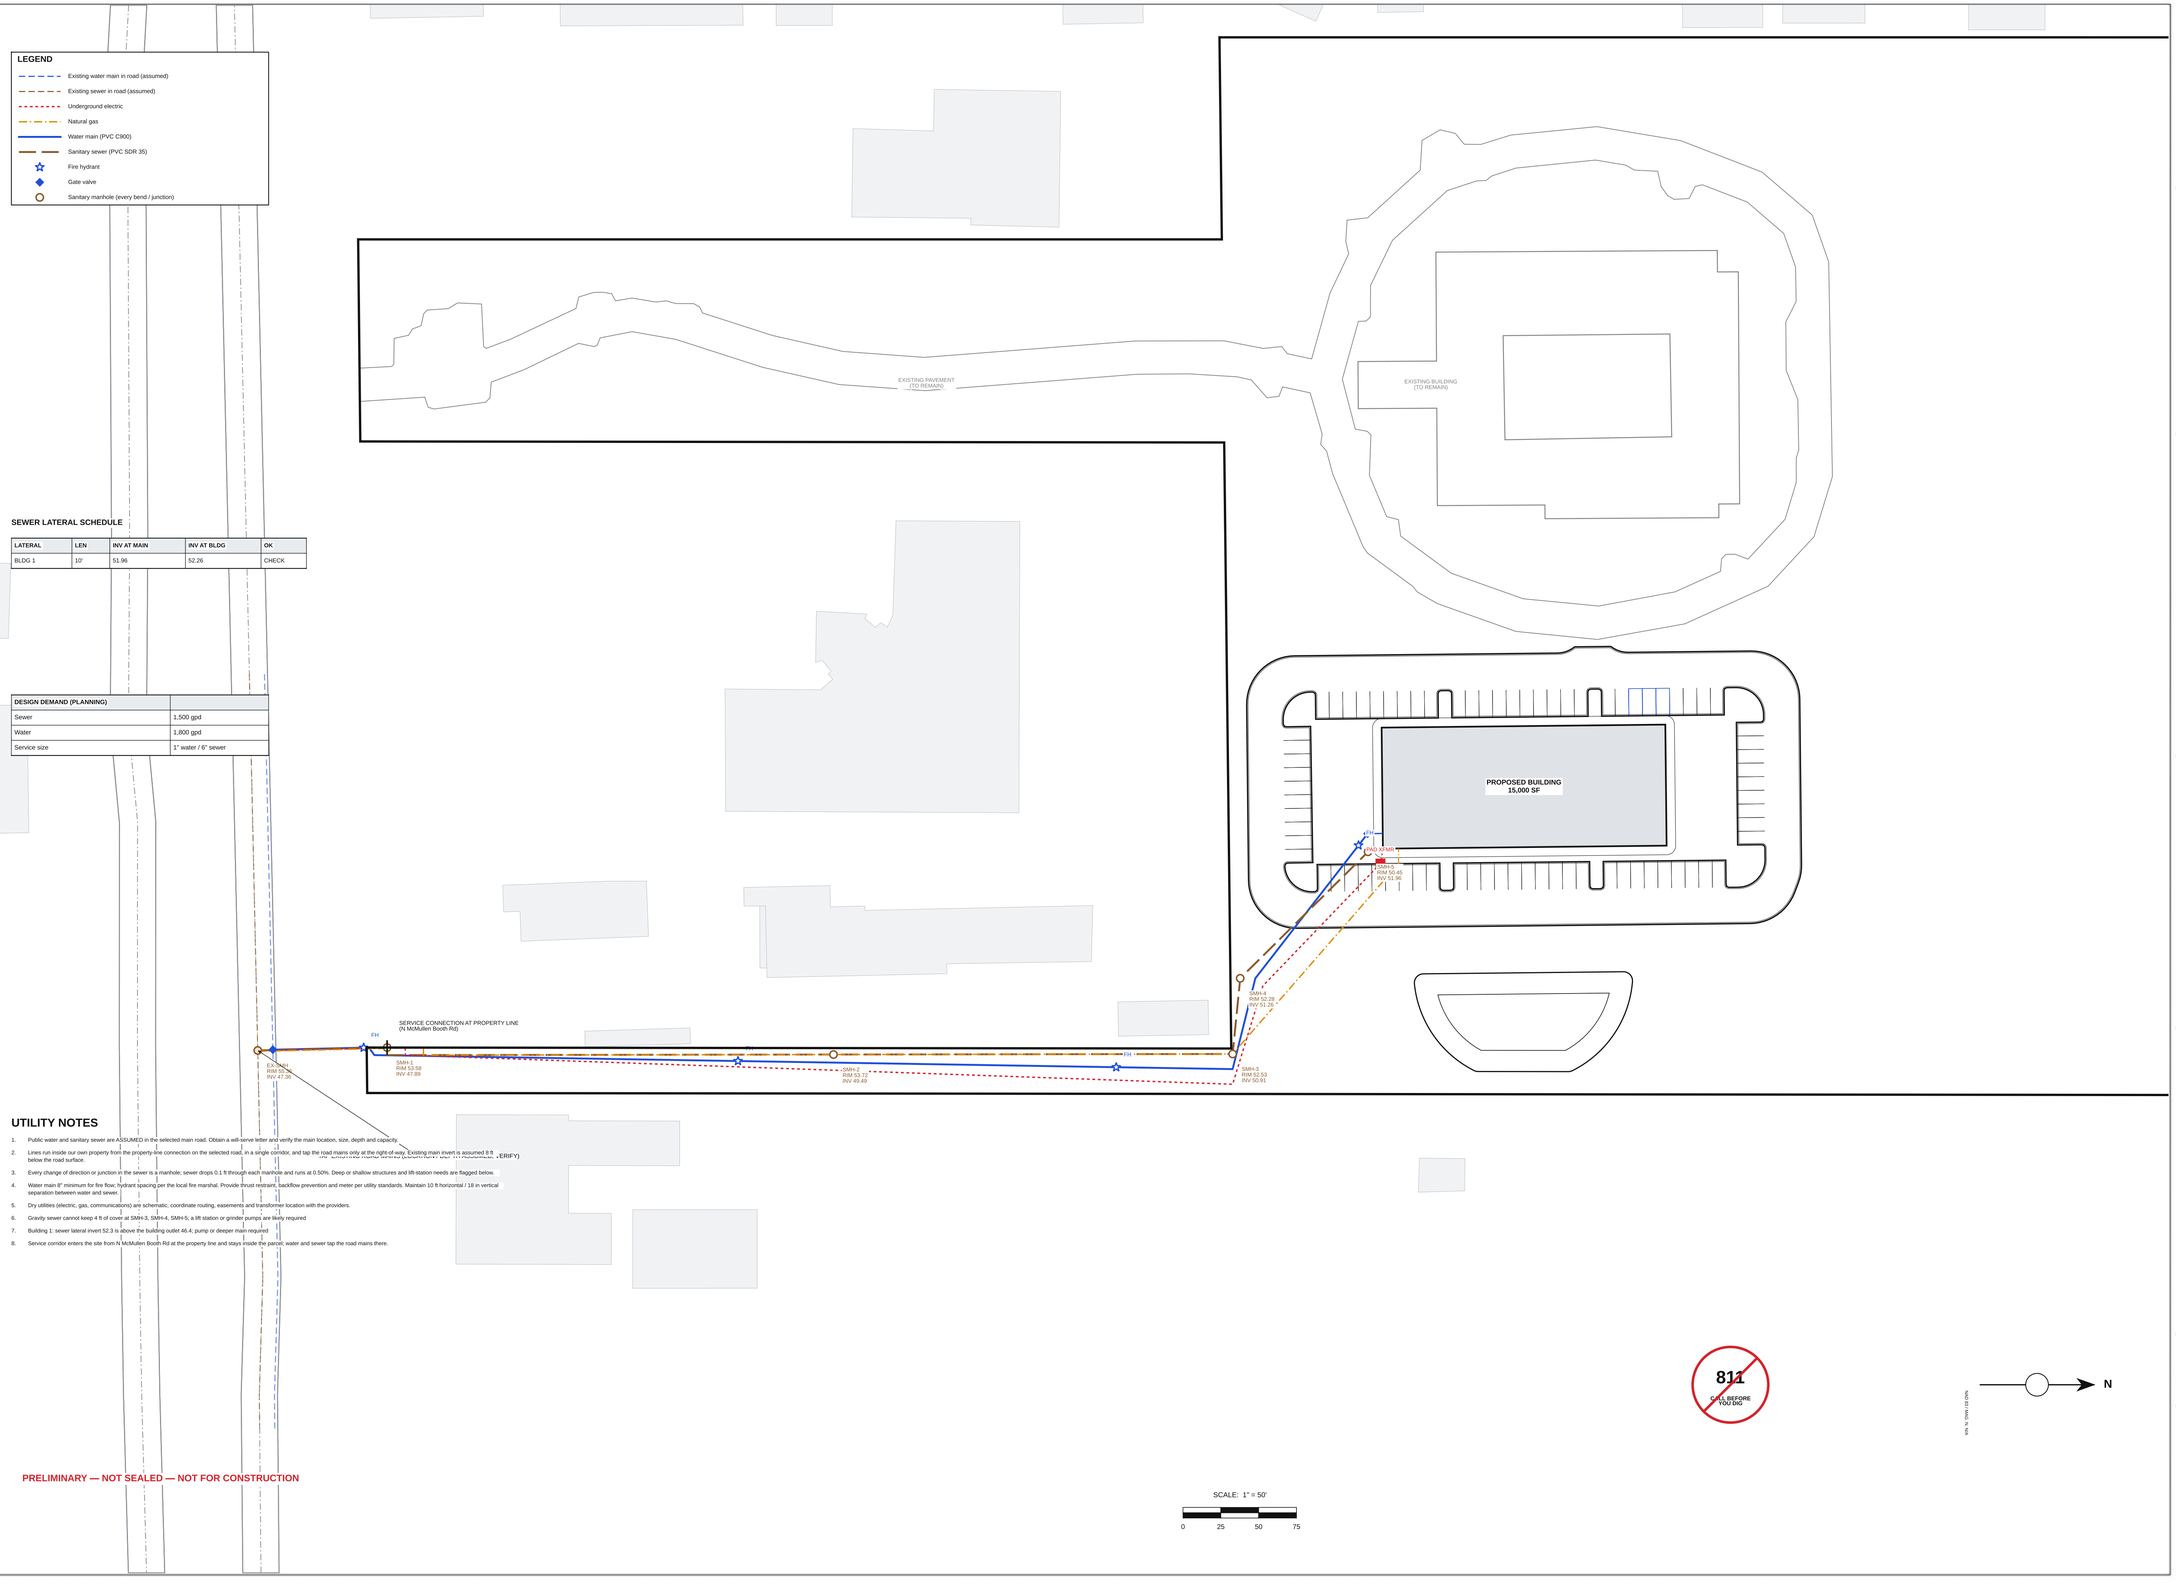

SEWER LATERAL SCHEDULE

LATERAL	LEN	INV AT MAIN	INV AT BLDG	OK
BLDG 1	10'	51.96	52.26	CHECK

DESIGN DEMAND (PLANNING)	
Sewer	1,500 gpd
Water	1,800 gpd
Service size	1" water / 6" sewer

UTILITY NOTES

1. Public water and sanitary sewer are ASSUMED in the selected main road. Obtain a will-serve letter and verify the main location, size, depth and capacity.
2. Lines run inside our own property from the property-line connection on the selected road, in a single corridor, and tap the road mains only at the right-of-way. Existing main invert is assumed 8 ft below the road surface.
3. Every change of direction or junction in the sewer is a manhole; sewer drops 0.1 ft through each manhole and runs at 0.50%. Deep or shallow structures and lift-station needs are flagged below.
4. Water main 8" minimum for fire flow; hydrant spacing per the local fire marshal. Provide thrust restraint, backflow prevention and meter per utility standards. Maintain 10 ft horizontal / 18 in vertical separation between water and sewer.
5. Dry utilities (electric, gas, communications) are schematic; coordinate routing, easements and transformer location with the providers.
6. Gravity sewer cannot keep 4 ft of cover at SMH-3, SMH-4, SMH-5; a lift station or grinder pumps are likely required
7. Building 1: sewer lateral invert 52.3 is above the building outlet 46.4; pump or deeper main required
8. Service corridor enters the site from N McMullen Booth Rd at the property line and stays inside the parcel; water and sewer tap the road mains there.

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

SCALE: 1" = 50'

0 25 50 75

811 CALL BEFORE YOU DIG

N

VIA N McMULLEN BOOTH

PRELIMINARY
NOT SEALED
FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 50'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

UTILITY PLAN

C6

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION


Drawing: C3126FF7 UTILITY PLAN_Lapse UTILITY PLAN_06

PLANT SCHEDULE

KEY	BOTANICAL NAME	COMMON NAME	SIZE	QTY
LO	Quercus virginiana	Live Oak	3" cal.	24

LANDSCAPE NOTES

1. Landscaped / open area approx. 24,860 SF; turf (sod) to all disturbed areas not paved or planted.
2. Species are Florida-/region-appropriate selections by latitude; confirm against the local landscape ordinance (tree credits, buffers, parking-lot islands).
3. Provide automatic irrigation to all planting beds and turf; protect existing trees where practicable.
4. Pond side slopes to be seeded with a stormwater-tolerant mix.

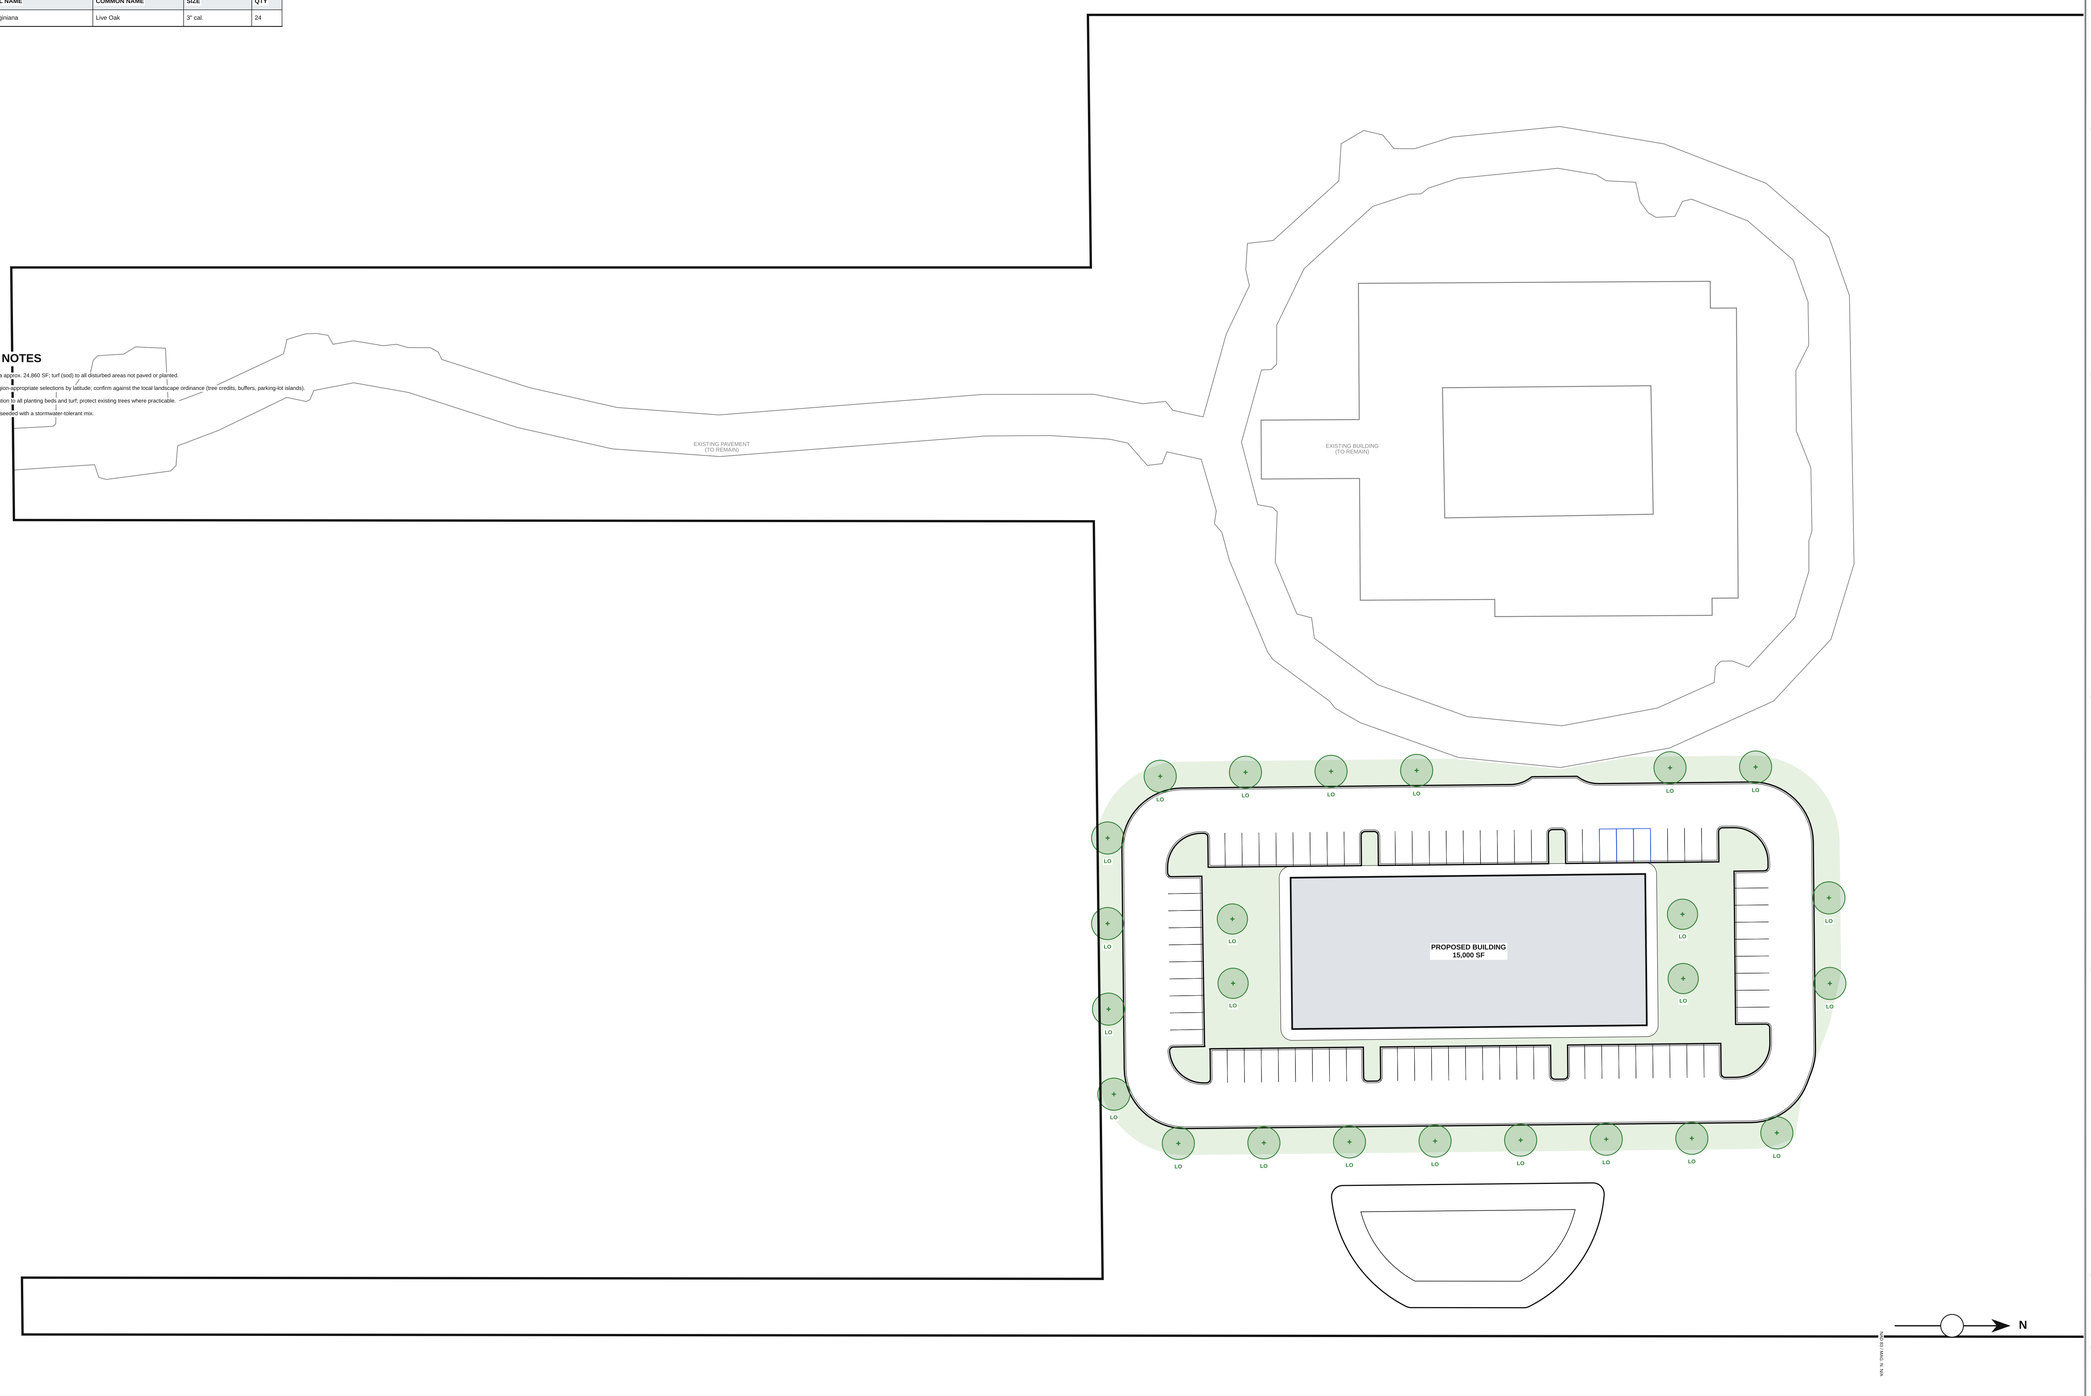

SCALE: 1" = 40'

0 20 40 60

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

PRELIMINARY

NOT SEALED

FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

LANDSCAPE PLAN

C7

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 LANDSCAPE PLAN | plotted: LANDSCAPE PLAN | C7


PHOTOMETRIC SUMMARY (PARKING / DRIVE)	
Poles	12 @ 20 ft mount
Average	0.63 fc
Maximum	6.5 fc
Minimum	0.00 fc
Max : Min	65.1 : 1
Avg : Min	6.3 : 1

LEGEND

- Pole-mounted LED area light
- Illuminance contour (foot-candles)

LIGHTING NOTES

1. Photometrics are a simplified point-source (cosine³) estimate for a typical full-cutoff LED area luminaire; replace with a manufacturer IES calculation for permit submission.
2. Target: 1.0 fc average, 0.2 fc minimum over parking and drives (IES RP-20 / local code); confirm the local lighting ordinance (spill, curfew, color temperature).
3. Luminaires full cutoff, 3000 K–4000 K, mounted on 20 ft poles on concrete bases (details by others).

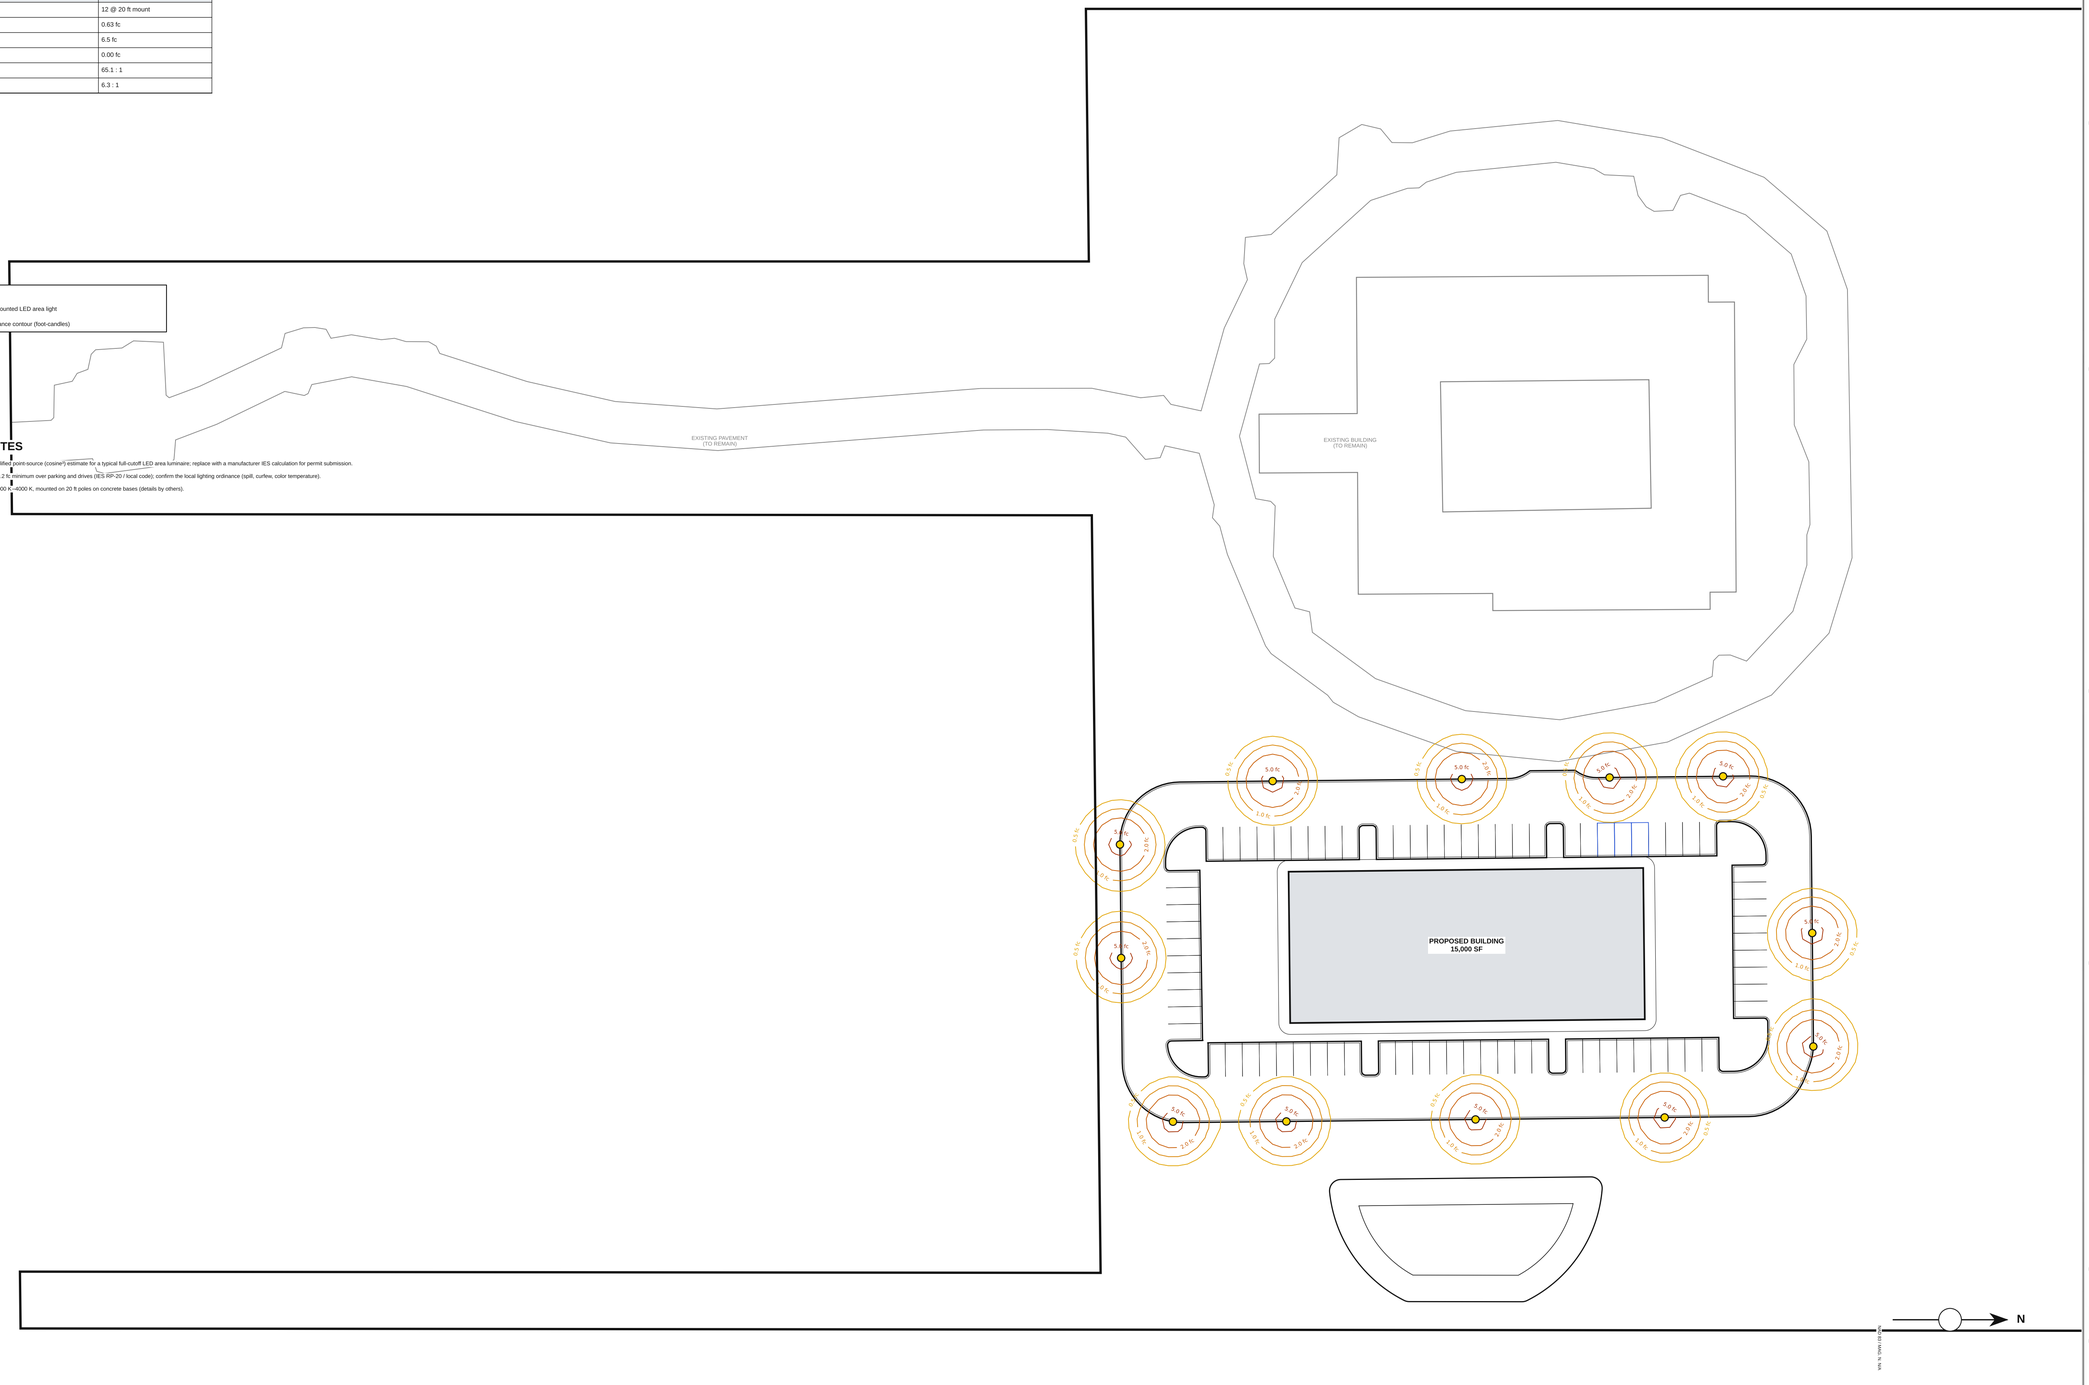

PRELIMINARY — NOT SEALED — NOT FOR CONSTRUCTION

PRELIMINARY

NOT SEALED

FOR PE SEAL

REVISIONS

NO.	DESCRIPTION	DATE
0	ISSUED FOR PRELIMINARY REVIEW	10/23/26



Location Plan

Aerial imagery: USGSNAIPPlus

Project:

Medical Office Campus

Lot 1, 3141 N McMullen Booth Rd

Clearwater, FL

Pinellas County

Zoning: HF

Prepared For:

Apollo Development

—

Designed By:	FORMA	Date:	10/23/26
Drawn By:	FORMA	Scale:	1" = 40'
Checked By:	—	Project No:	C3126FF7

Sheet Title:

SITE LIGHTING PLAN

C8

© FORMA DESIGNS 2026 — PRELIMINARY, NOT FOR CONSTRUCTION

Drawing: C3126FF7 SITE LIGHTING PLAN (Layout: SITE LIGHTING PLAN) - C8